



Yuasa Technical Data Sheet

Yuasa YBX5335 - YBX5000 Silver High Performance SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 95Ah |
| Cold Cranking Amps (EN1) | 830A |

Dimensions

| | |
|--------|-------|
| Length | 303mm |
| Width | 174mm |
| Height | 222mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 21.9kg |
| Dry Weight | - |
| Acid Volume | - |

Container Features

| | |
|---------------------------|----------------|
| Case Type | D31 JIS |
| Hold Down | B1 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | - |
| Lid Type | SMF Double Lid |

Technology

| | |
|-------------------------|------------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Vibration | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 5A |



Terminal Type

T1

Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout



Battery Hold-down

B1

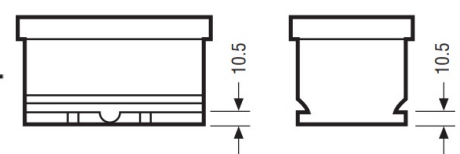

Data Sheet generated on 25/04/2017 - E&OE